


Firmware Update

As of the firmware with date info 2022-09-13 it is possible to update the Firmware using the HID Setting software. Connect with the device you want to update and change to the second tab labelled "Firmware Update"

- 1: Click on [SELECT BIN FILE] will open the file selector. For your convenience, you can select the Firmware file in the explorer press and hold the [Shift] key, right-click and select "copy as path". After this you can simply paste the path into the file input line in the file selector.
- 2: Start the update with click on [DOWNLOAD BIN FILE]
- 3: Please wait until the process is finished.
- 4: Click on [REBOOT&RESTART]
- 5: Sometimes you get the error message "Flash failed".
Please ignore this and test the device. If in doubt, do a power cycle.

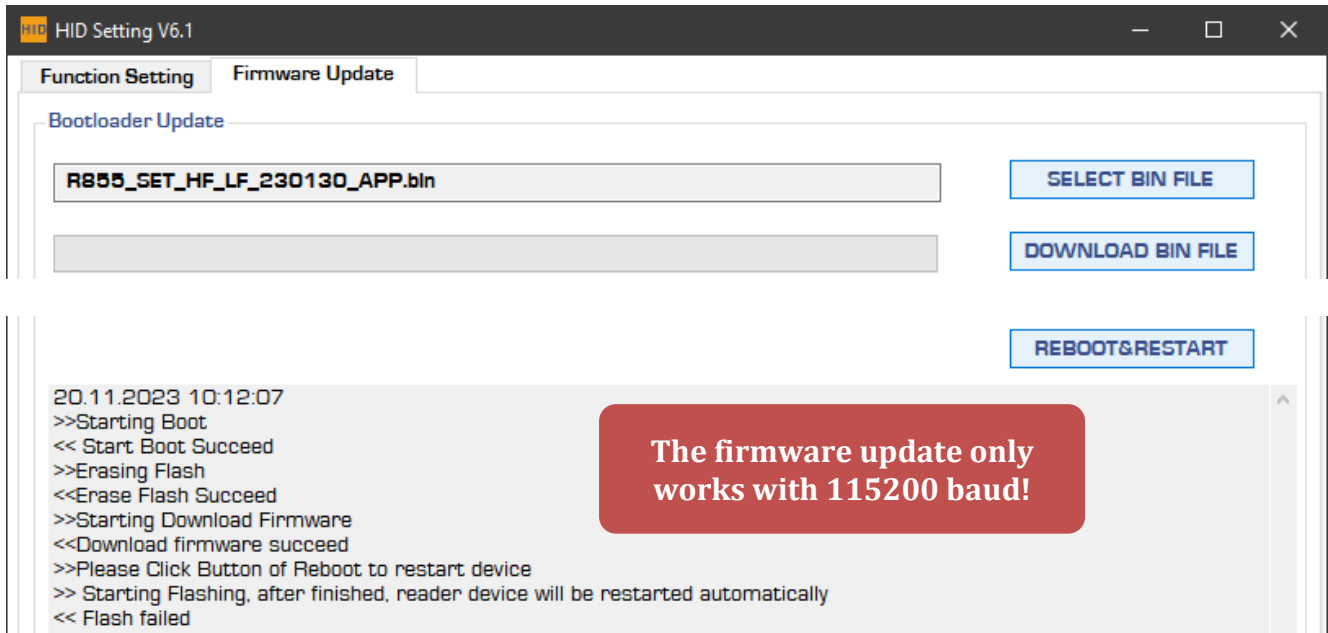

HID Setting V6.1

Function Setting | **Firmware Update**

Bootloader Update

R855_SET_HF_LF_230130_APP.bin


SELECT BIN FILE

DOWNLOAD BIN FILE

REBOOT&RESTART

20.11.2023 10:12:07
 >>Starting Boot
 << Start Boot Succeed
 >>Erasing Flash
 <<Erase Flash Succeed
 >>Starting Download Firmware
 <<Download firmware succeed
 >>Please Click Button of Reboot to restart device
 >> Starting Flashing, after finished, reader device will be restarted automatically
 << Flash failed

The firmware update only works with 115200 baud!

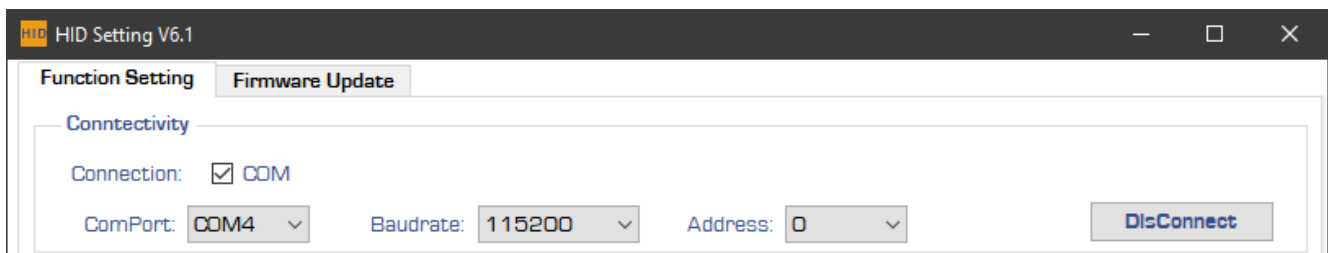

HID Setting V6.1

Function Setting | **Firmware Update**


Connectivity

Connection: ☒ COM

ComPort: COM4 Baudrate: 115200 Address: 0

DisConnect

Now you can change back to the tab "Function Setting" DisConnect = > Connect and see the new version information in the status bar.

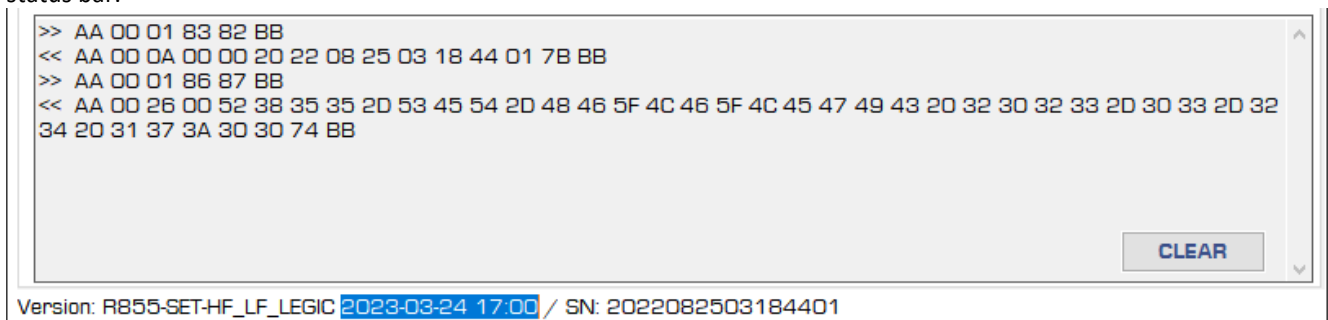

>> AA 00 01 83 82 BB
 << AA 00 0A 00 00 20 22 08 25 03 18 44 01 7B BB
 >> AA 00 01 86 87 BB
 << AA 00 26 00 52 38 35 35 2D 53 45 54 2D 48 46 5F 4C 46 5F 4C 45 47 49 43 2D 32 30 32 33 2D 30 33 2D 32 34 2D 31 37 3A 30 30 74 BB

CLEAR

Version: R855-SET-HF_LF_LEGIC 2023-03-24 17:00 / SN: 2022082503184401